

JCPT(RT)

Self-Propelled Rough-Terrain Scissor Lifts



JCPT2223RT


	S.W.L	750kg
	S.W.L On Extension	500kg
	Max.Occupants	4
	A Max.Working Height	22.00m
	B Max.Platform Floor Height	20.00m
	C Overall Length	4.80m
	D Overall Width	2.27m
	Overall Height(Rails Up)	3.68m
	E Overall Height(Rails Down)	2.84m
	Platform Size(Length/Width F)	4.35m×1.85m
	G Platform Extension Size	2.00m
	Ground Clearance	0.22m
	Wheelbase	3.13m
	Turning Radius(Inside/Outside)	2.15m/5.35m
	Engine	Kubota v2403-M-DI 36.5kW/2600rpm
	Travel Speed(Stowed)	6.0km/h
	Travel Speed(Raised)	0.7km/h
	Up/Down Speed	75/60sec
	Gradeability	30%
	Max.Working Slope	2°/3°
	Hydraulic Tank	160L
	Diesel Tank	90L
	Tyres	30×12-20
	Weight	12040kg

Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- 4WD
- Self-leveling Hydraulic Outriggers
- Automatic Brake System
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Sensor With Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Safety Brackets
- Folding Guardrails
- Automatic Single Roll Out Deck
- Flashing Beacon
- Slide-out Engine Tray
- Emergency Stop Button
- Anti-restart Engine Protection
- European III Emission Engine
- Hydraulic Oil Cooler
- Vertical Style Lift Gate

Options

- Overload Sensor With Alarm
- AC power On The Platform
- Hydraulic Generator
- Hydraulic Welder
- Hydraulic Compressor
- Hydraulic Water Pump
- Platform Work Lights
- Non Marking Tyre

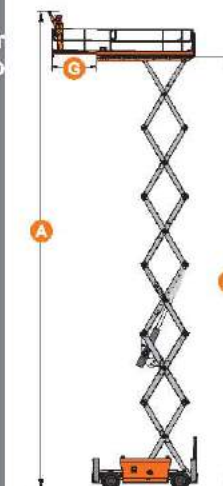

Automatic Leveling Outriggers



Flashing Beacon



Emergency Lowering System



Gradeability



Extended Platform



Folding Guardrails



Swing-out Engine Tray



Safety Bracket