
MultiTrack



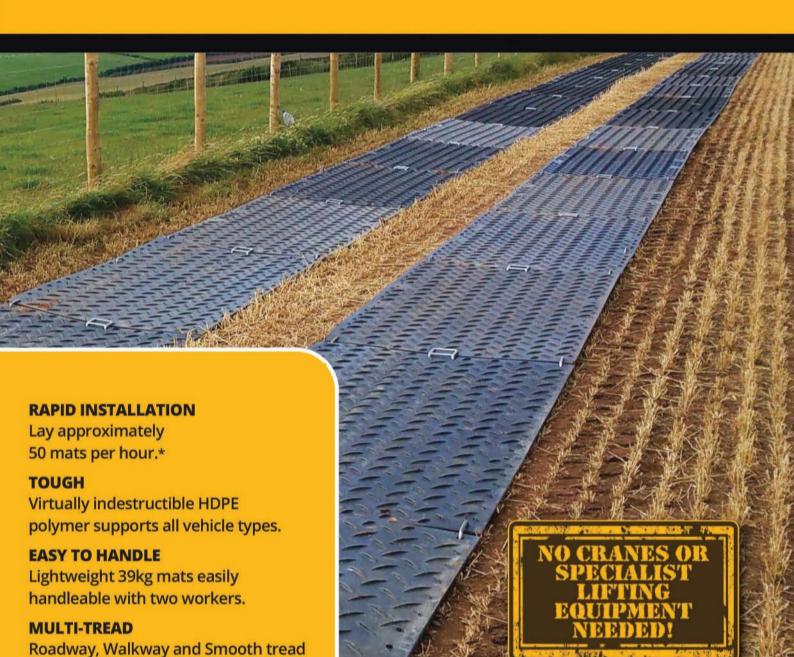

pedestrian needs.

options cater for various vehicular and

ENVIRONMENTALLY FRIENDLY

Made from 100% recycled

plastic and fully recyclable.

CALL US ON 0333 323 2100 smithshire.com

*FAST, EASY, ECONOMICAL

Install approximately 50 mats

per hour with a team of


4 plus forklift driver.

MultiTrack









Surface Area: 2.95m²

Weight: 39kg

Tread Options: Roadway,

Walkway and Smooth, or a combination

Connectors: 10 joining points.

A choice of standard clip joiners, low profile joiners or bolted joiners,

plus anchor pins

Packed in: Stillage of 25 mats

Stillage Pack: Weight: 1105kg

Dimensions:

2550 x 1260 x 900mm



BS7976 part 2

Deflection:

Tested on varying CBR ground conditions using a 300mm diameter steel platen with 6 tonnes load to simulate the pressure of an HGV wheel

Ground CBR 11.35%: Deflection 17.68mm

Ground CBR 8.58%: Deflection 20.41mm

Ground CBR 4%: Deflection 22.00mm



It is the user's responsibility to assess the load-bearing capacity of the ground, and to only operate vehicles within the weight that the ground is capable of safely supporting. Ground-Guards Ltd accepts no liability whatsoever for any damage, loss or injury arising from the ground conditions on which these products are used.

MultiTrack mats are not suitable to use for bridging purposes. Damage caused by mechanical equipment (e.g. cuts by digger buckets) or sharp protrusions beneath the mats is not covered by this guarantee.



Roadway

Walkway

Smooth







CALL US ON 0333 323 2100 smithshire.com